

THERMA=GUARD

AMERICA'S STRONGEST INSULATING UNDERLayment!

**DUTCH
TECH**



R-VALUE UP TO 12*

*R Value based on combined radiant and thermal resistance function and depends on assembly. See back side for details.


Therma-Guard products manufactured by Dutch Tech are warranted against defects in materials and workmanship for 10 years in approved building or OEM applications when installed in accordance with Dutch Tech's installation instructions.

For metal buildings, pole barns, shops, steel framing, residential and commercial metal roofing.




WHY USE THERMA=GUARD?

- Strongest insulative underlayment on the market
- Highly resistant to birds and pests
- Industry-leading UV-resistant coating
- Holds staples like crazy
- Easy to install
- Reduces condensation up to 95%
- Highly reflective
- Vapor Barrier

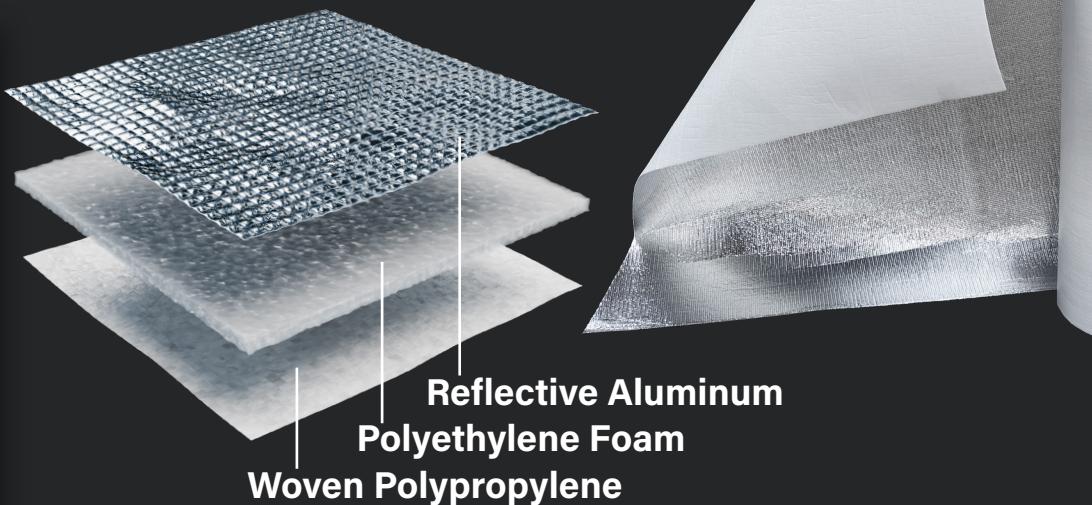

Available in 6' or 4' width, both come with 2" overlap. Also available with or without tape sealing edge.

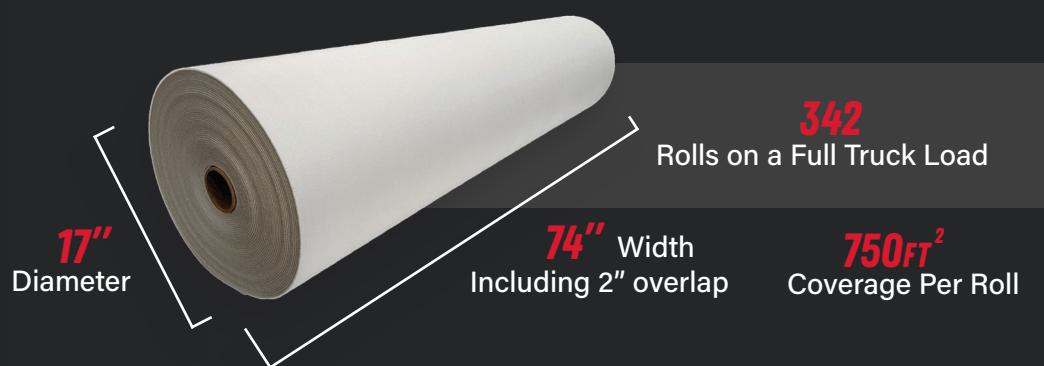

DUTCH TECH

Call: 931-325-0000 • 107 3rd Ave E, Lobelville, TN 37097
dutchtech.com or contact an authorized dealer



ADVANCING STANDARDS
TRANSFORMING MARKETS

RIMA International
Reflective Insulation Manufacturers Association International




Thermal Resistance results for Therma-Guard (units $\text{ft}^2 \cdot \text{h} \cdot ^\circ\text{F} / \text{BTU}$)

Assembly 1:

Low e (reflective) facing down (toward the interior) under 29 gauge metal roof, Heat flow down. R (air-film resistance included):

Roof slope

0 / 12	R 5.1
4 / 12	R 4.1
8 / 12	R 3.3

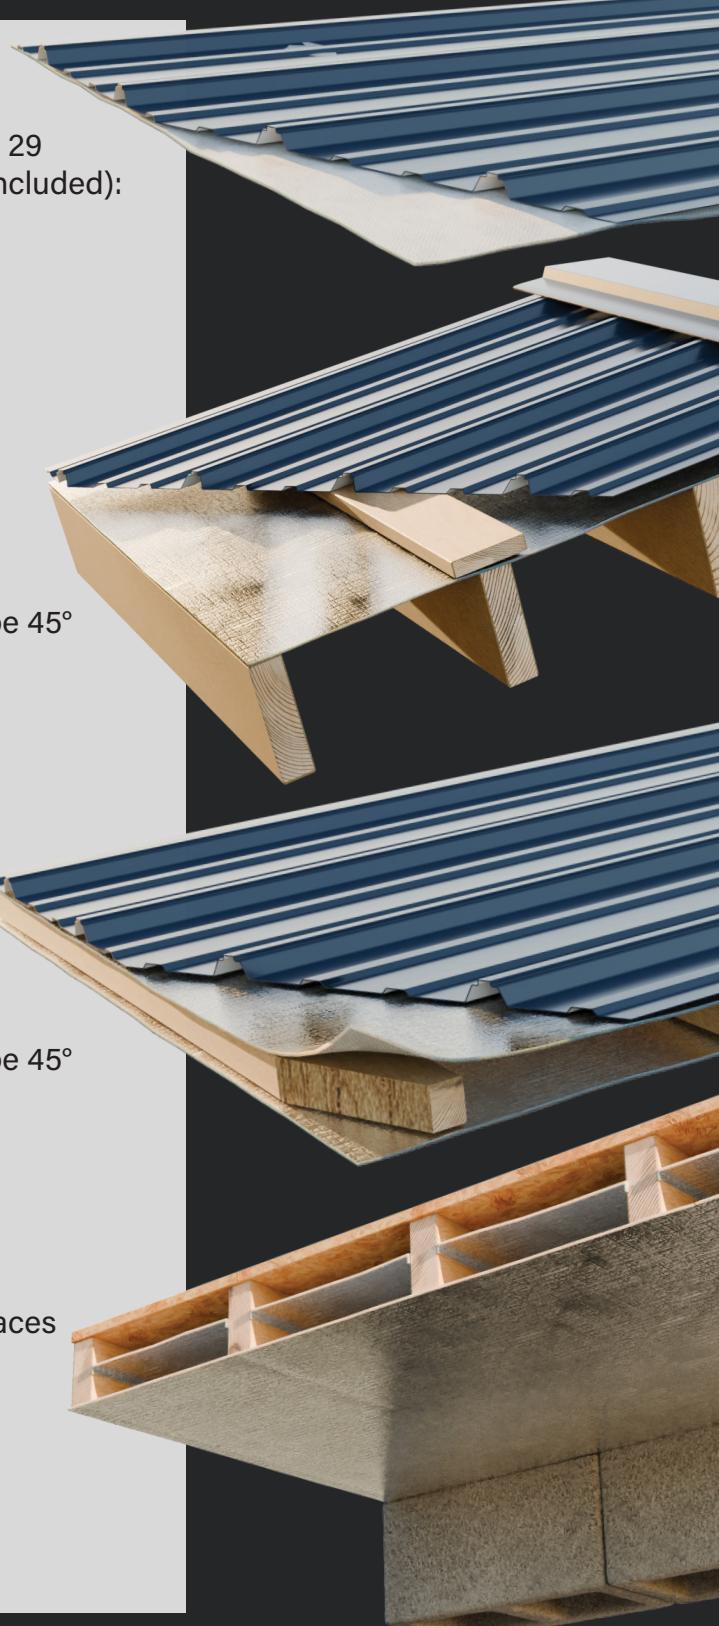

Assembly 2:

1x4" board purlin under metal roof creating $\frac{3}{4}$ " air gap:

	Roof slope 0°	Roof slope 45°
Heat flow down	R 4.8	R 4.4
Heat flow up	R 2.9	R 3.3

Assembly 3:

Two reflective sides, one reflective under metal facing down, then 2x4" board creating 1.5" air gap, then another reflective facing up:

	Roof slope 0°	Roof slope 45°
Heat flow down	R 6.4	R 5.2
Heat flow up	R 3.8	R 4.2

Assembly 4:

Floor above crawl space, low emittance (reflective) side faces downward, creating two enclosed air spaces:

	Floor slope 0°
Heat flow down	R 12
Heat flow up	R 6.9



The R-values shown above, as calculated by R&D Services Inc., include the enclosed air space, the insulation material, and the air-film resistance taken from ASHRAE Handbook-Fundamentals. Results are rounded in accordance with FTC Rule.